FIG.1

F; Focal distance

2F: Interfocal distance



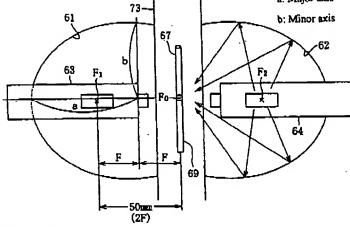


FIG.2




FIG.3

Mirror	S11	S2	IS3	S8	S12	\$13	S14	S15
Minor axis (a)	48.8		55	58.5	63.26	· 68.88	76.06	85.71
Major axis (b)	54,8		60.415	63.59	68.02	73.28	80.06	89.28
Focal distance (F)	25		25	25	25	25	- 25	25
Eccentricity (e = F/b)	0.48		0.41	0.39	0.37	0.34	0.31	0.28
Minor axis / major axis ratio	0.89		0.91	0.92	0,93	0.94	0.95	0.96
Quartz tube aperture diameter	70		70	70	70	70	70	70
Lamp aperture diameter	- 50				50	50	50	50

Cylindrical 650 W lamp (JCD 100V-650WC)

Melt zone power density	211	2.2	2.3	24	2.4	24	2.4	2.4
±25 mm power	364.0	377.0	382.6	383.8	381.9	378.9	374.2	365.6

Plate 650 W lamp (JCS 100V-650WCC)

Melt zone power density	2.3	2.4	2.5	2.6	26	2.6	2.6	2.6
±25 mm power	407.5	422.2	430.3	436.0	438.0	434.8	431.4	424.4



Melt zone average power density


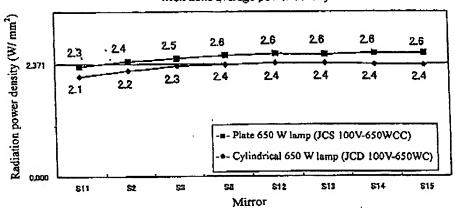


FIG.5

Radiation power at region ±25 mm from focal point

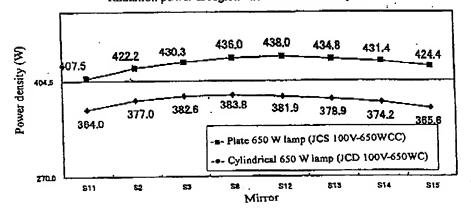

Oblon, Spivak, et al. 703-413-3000 Docket # 294723us Sheet 3 of 14


FIG.6

3/14

Muror	S6 .	S7	S8	S9	S10	S16
Minor axis (a)	38.5	48.5	58.5	68.5	78.5	88.5
Major axis (b)	41,85	52.72	63.59	74.46	85.33	96.19
Focal distance (F)	16.41	20.67	25	29.19	33.45	37.69
Eccentricity (c = F/b)	0.39	0.39	0.39	0,39	0.39	0.39
Minor axis / major axis ratio	0.92	0.92	0.92	0.92	0.92	0.92
Quartz tube aperture diameter	70	70	70	70	70	70
Lamp aperture diameter	50	50	50	50	50	50

Plate 650 W lamp (JC\$ 100V-650WCC)

Mett zone power density	1.6	2.2	2.6	· 2.7	2.8	2.8
±25 mm region radiation power	228.1	401.7	436.0	475.4	495,2	504.7

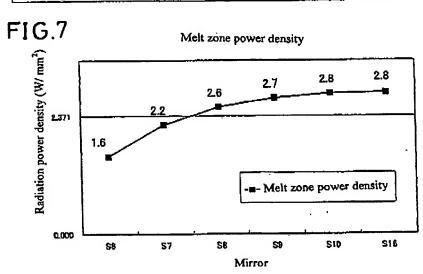

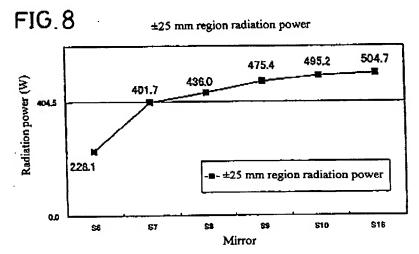


FIG.9


S8 mirror

Plate

I late							
Lamp rating	350	450	550	650	750	850	950
Lamp total power	700	900	1100	1300	1500	1700	1900
Filament width	4.3	5.5	6.8	8	9.2	10.5	11.7
Filament length	10.5	10.5	10.5	10.5	10.5	10.5	10.5
Filament thickness	3	3	3	3	3	3	3
Volume	135.45	173.25	214.2	252	289.8	330.75	368.55
Lamp rating / Volume	2.6	2.6	2.6	2.6	2.6	2.6	2.6


Melt zone power density	2.0	2.3	2.4	2.6	27	2.8	2.8
Temperature	1960	2025	2069	2094	2118	2139	2149

FIG.10

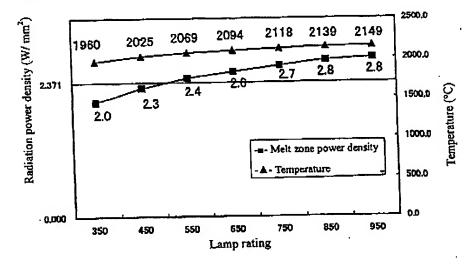


Oblon, Spivak, et al. 703-413-3000 Docket # 294723us Sheet 5 of 14

FIG.11-1

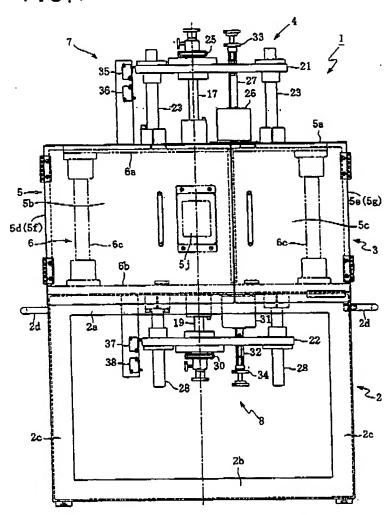

Oblon, Spivak, et al. 703-413-3000 Docket # 294723us Sheet 6 of 14


FIG.11-2

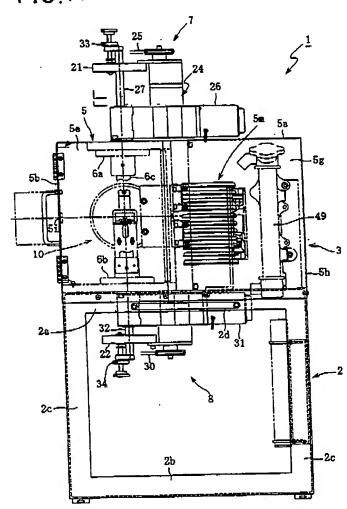

Oblon, Spivak, et al. 703-413-3000 Docket # 294723us Sheet 7 of 14

7/14


FIG.11-3

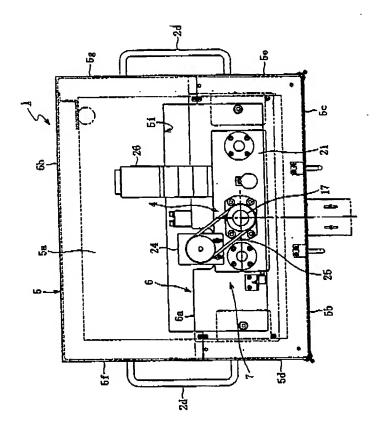

Oblon, Spivak, et al. 703-413-3000 Docket # 294723us Sheet 8 of 14


8 / 14

FIG.11-4

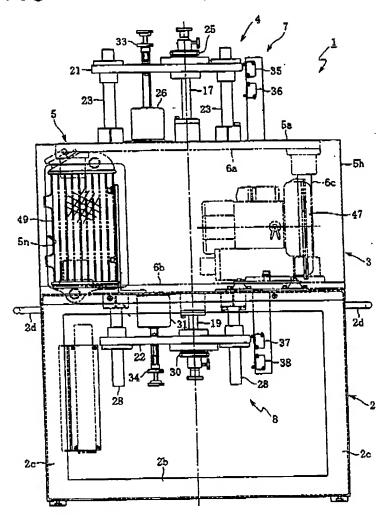


9/14

FIG.12-1

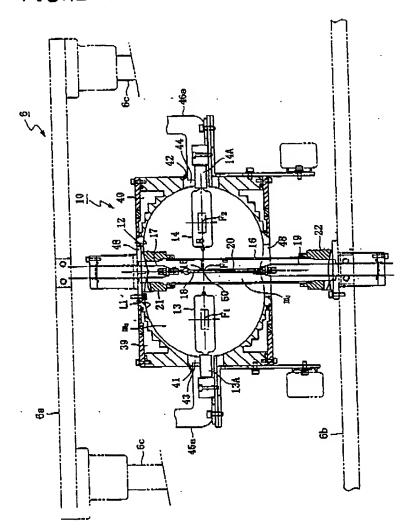

Oblon, Spivak, et al. 703-413-3000 Docket # 294723us Sheet 10 of 14

FIG.12-2

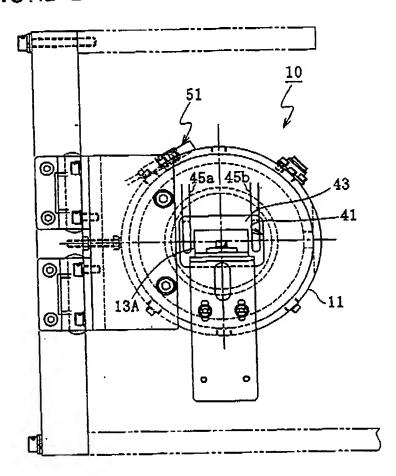

Oblon, Spivak, et al. 703-413-3000 Docket # 294723us Sheet 11 of 14



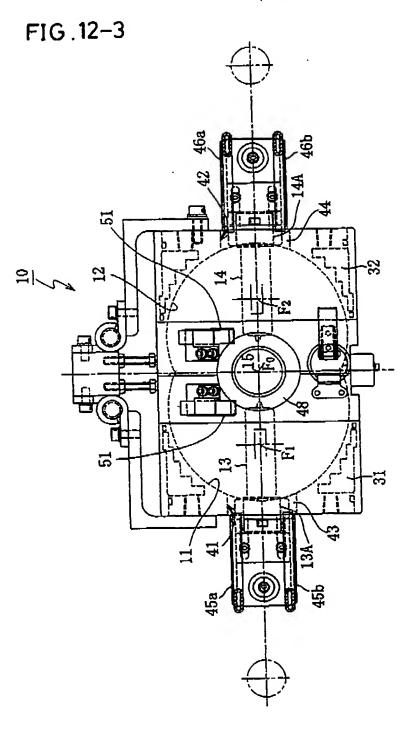


FIG. 13


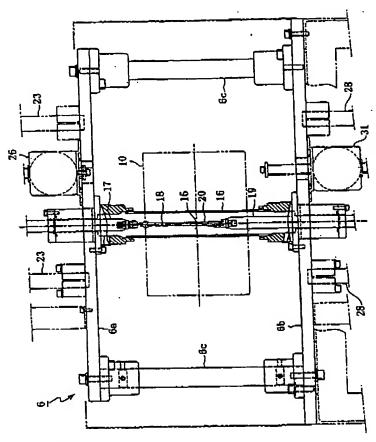



FIG.14A

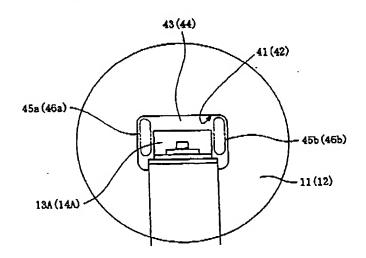


Oblon, Spivak, et al. 703-413-3000 Docket # 294723us Sheet 13 of 14

13/14

FIG.14B



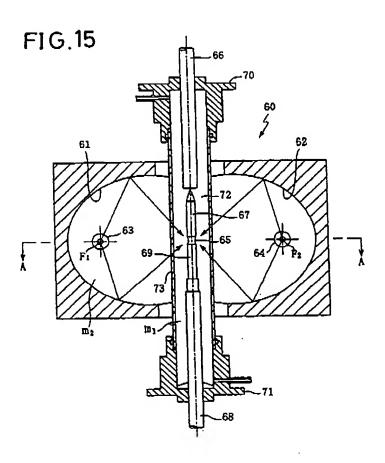

Oblon, Spivak, et al. 703-413-3000 Docket # 294723us Sheet 14 of 14

FIG.16


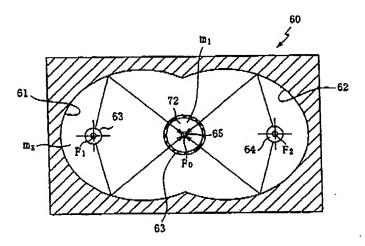


FIG.17



Moving direction